



SIM1 Guitar

Android/iOS App for XT-1
User Manual – EN

XT - 1
ONE PEDAL - INFINITE GUITARS

Pag. 3.....Profile Section (**Login/Register**)

Pag. 5.....Profile Section (**Settings**)

Pag. 6..... Dongle Wi-Fi & SIM1Hotspot (**Wi-Fi Connection to XT-1**)

Pag. 7..... Profile Section (**Wi-Fi Settings**)

Pag. 8.....Preset Section (**Preset Import**)

Pag. 9.....Preset Section (**Edit Preset**)


Pag. 10.....Profile section (**Source Guitar Editing**)

Pag. 12..... Library section (**Sound Store**)

Pag. 13..... Community section (**Free of Charge Sounds**)

Step 1
Profile Section
(Login & Register)

Login with the same ID
and Password of your
first registration on
[https://store.sim-
one.it/](https://store.sim-one.it/), otherwise
create a new account

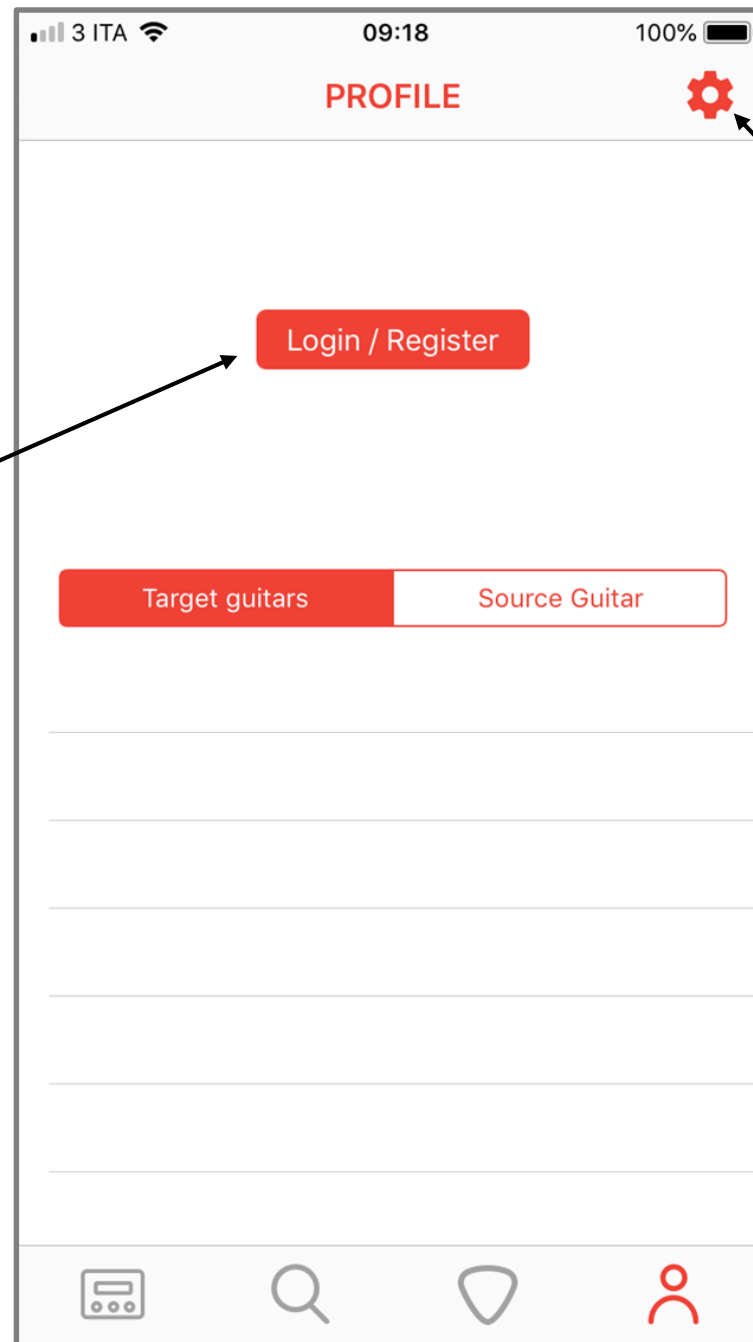

Change the App settings

3 ITA 09:19 100%

LOGIN ✕

Email info@sim-one.it

Password ●●●●●●●●

Login

FIRST TIME HERE?

Create an account >

Make the login
with your e-mail
and password

3 ITA 16:12 49%

< **REGISTER**

Paul

Smith

info@sim-one.it

●●●●●●●●

●●●●●●●●

XT-1 Serial Number

Register

Step 1
Profile Section
(Login & Register)


To make your own
new Profile
Registration fill in all
the requested
fields.

NB: Make sure to
correctly digit the
serial number of the
pedal. You can get it
by holding the
bypass switch of XT-
1 for 5 seconds.

Step 1
Profile Section
(Settings)

To connect both,
XT-1 and the
phone to the same
Wi-Fi network

To check your login
account

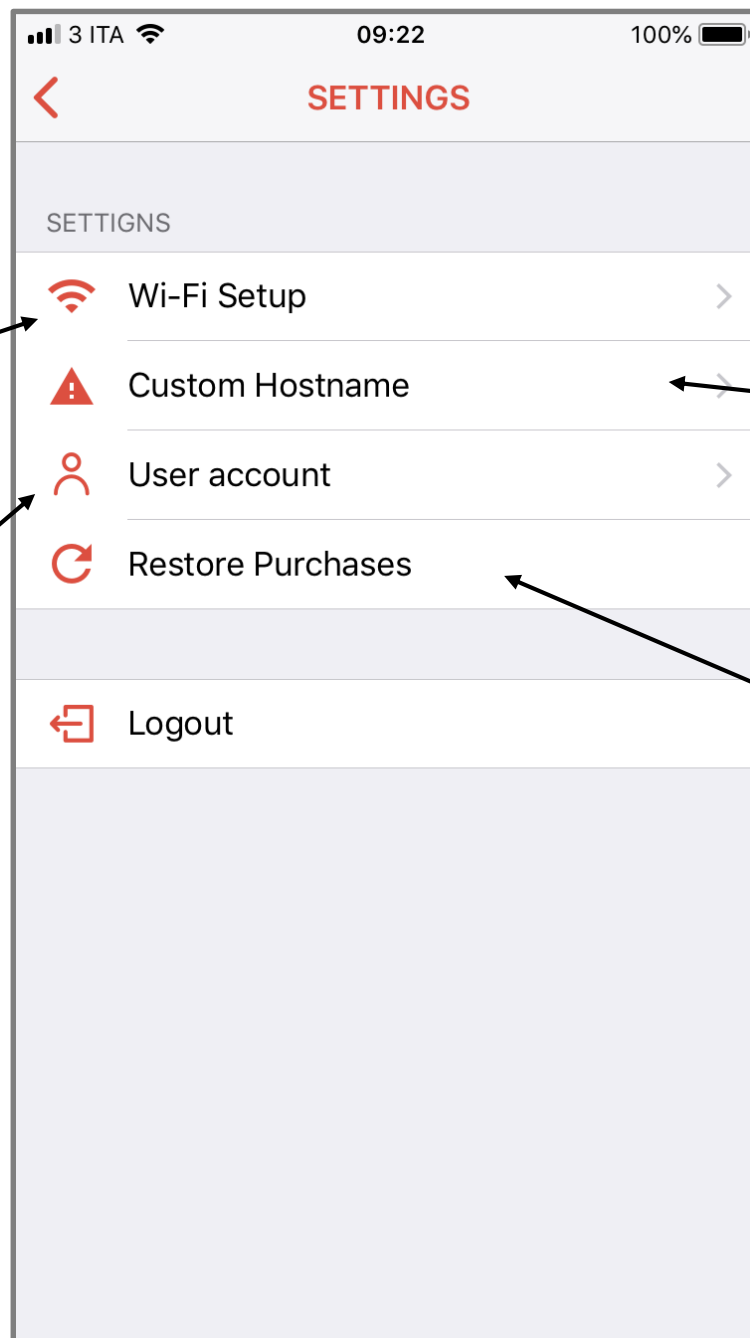


To modify the Hotspot
name of your XT-1
(Android Version only),
and to test the Wi-Fi
connection with XT-1

After the Log In, click on
“Restore Purchases”: to
download the guitars
previously purchased
from the SIM1 Sound
Store

Step 2

Dongle Wi-Fi USB Adapter & SIM1Hotspot (Wi-Fi Connection to XT-1)

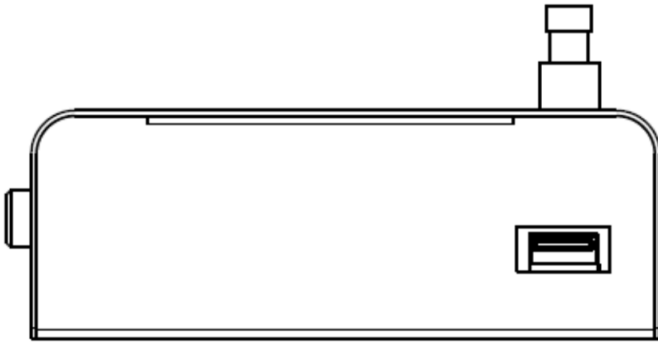

- With the pedal off, insert the Dongle Wi-Fi USB Adapter (Edimax EW-7811UN* - separated accessory) in the USB port.
- Switch the pedal on and the dongle will start to flash.
- Check the Wi-Fi Network of your mobile phone or tablet and connect it to the SIM1Hotspot, by digiting the following password: 1234567890.
- Open the “SIM1 Guitar” app that your previously downloaded from the iOS App Store or from Google Play.




* The App and XT-1 are configured to be used with this Dongle Wi-Fi model only

The app is now connected to “SIM1 Hotspot” of your device XT-1, through Wi-Fi System of your mobile/Tablet.

Your mobile or tablet are not connected to the internet. This means that you have to disconnect from the pedal to use the internet (for example to buy a new guitar from the in-app purchase system) and then reconnect again to XT-1 (to send this guitar to the pedal).

Solution: This section allows to connect both, XT-1 and your mobile phone, to the same Wi-Fi network. They will be able to communicate one with each other, without losing the internet connection.

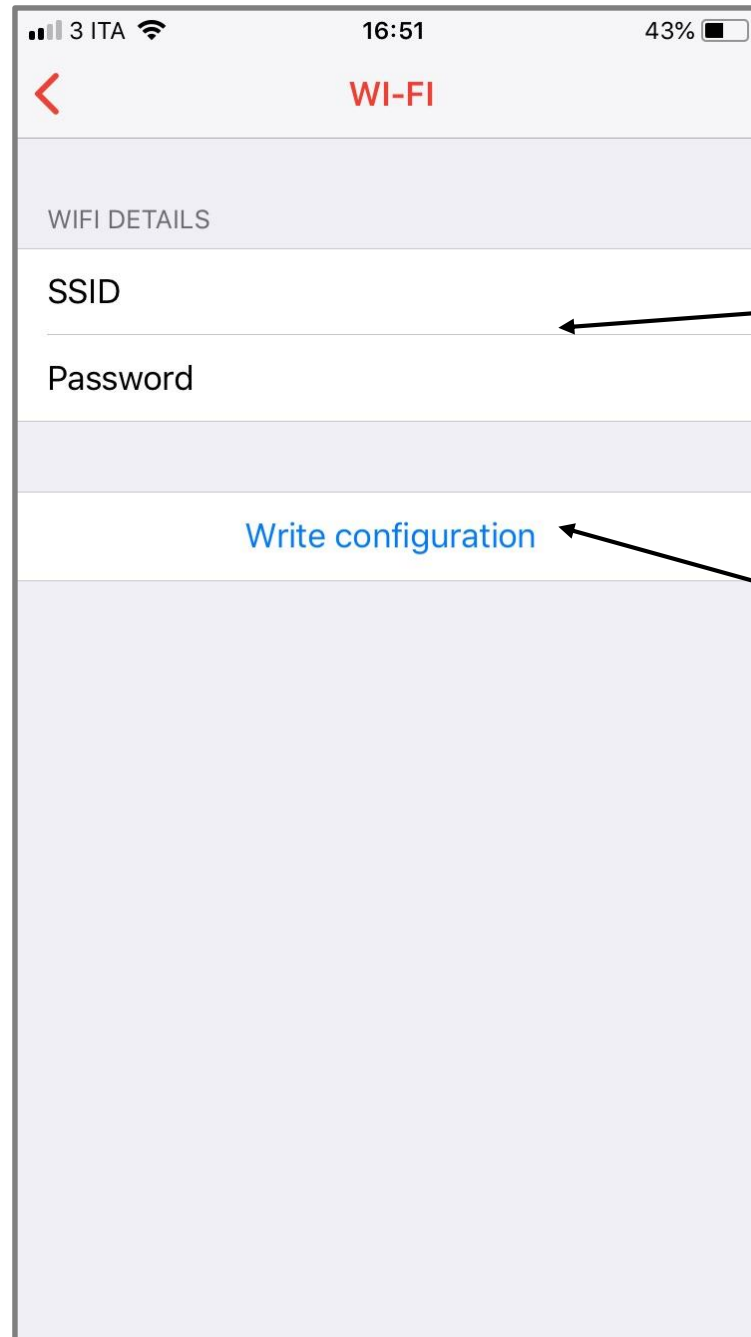


Step 3

Profile Section (Wi-Fi Settings)


When connected to “SIM1 Hotspot”, write name and password of your WI-FI home or office network.

Click “Write configuration”, the pedal will automatically restart, and both devices will be connected to the same router. XT-1 will memorize this network and will be automatically connected to it every time is nearby this Wi-Fi spot.

NB: When XT-1 is connected to your Wi-Fi Network, SIM1Hotspot is not visible anymore. Switch off your router and restart XT-1 if you wish to have a direct connection with XT-1

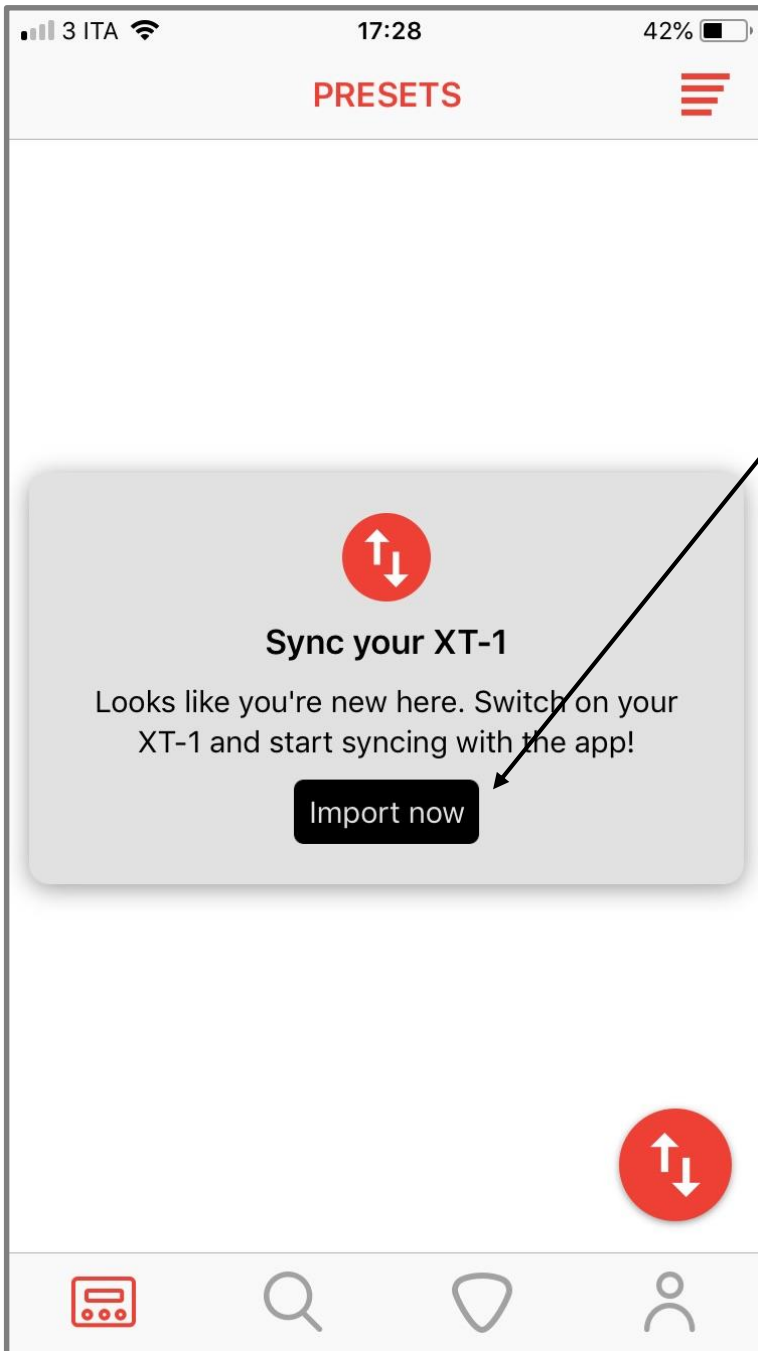

With your phone/tablet connected to the same Wi-Fi network of XT-1, or to the SIM1 Hotspot, import all the 30 presets of the pedal by clicking “import now”.

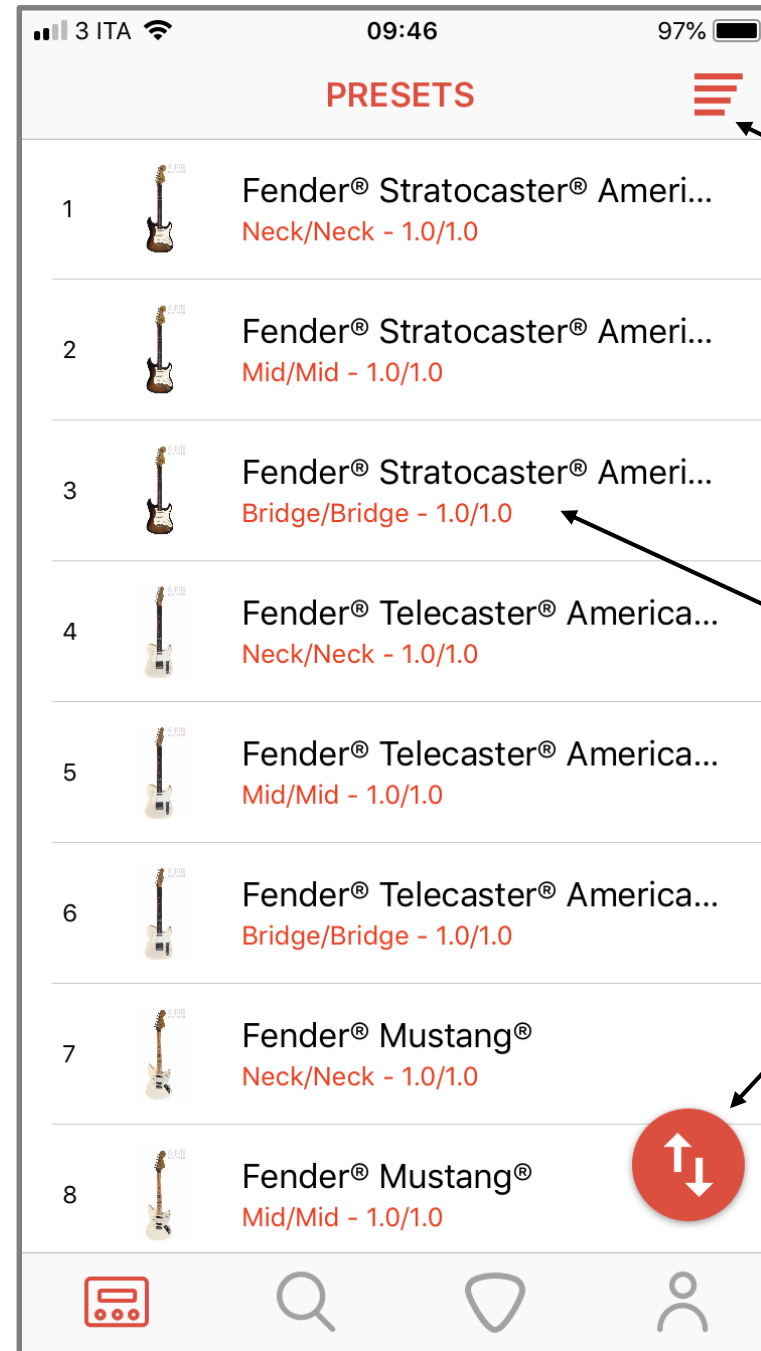

Step 4 Preset Section (Preset Import)

Change preset position. Click here then slide with your finger on the right side of each guitar to modify its position

Enter and edit each preset

Use this button to import/export from/to XT-1 your edits

Step 4
Preset Section
(Edit Preset)

3 ITA 09:47 97%

EDIT PRESET

SOURCE

Select guitar Strat Mex/Neck >

TARGET

Select guitar Fender® Stratocaster® Am... >

Select pickup neck >

OUTPUT

Volume Std Out 1,00 - +

Volume Bal Out 1,00 - +

Set preset


Change Source
Guitar

Select a new
Target Guitar and
its pickup


Edit the two
Volumes related to
the two outputs of
XT-1

Save the new edited preset

NB: after the preset editing,
export your changes to XT-1,
using the Import/Export
button. See the previous page.

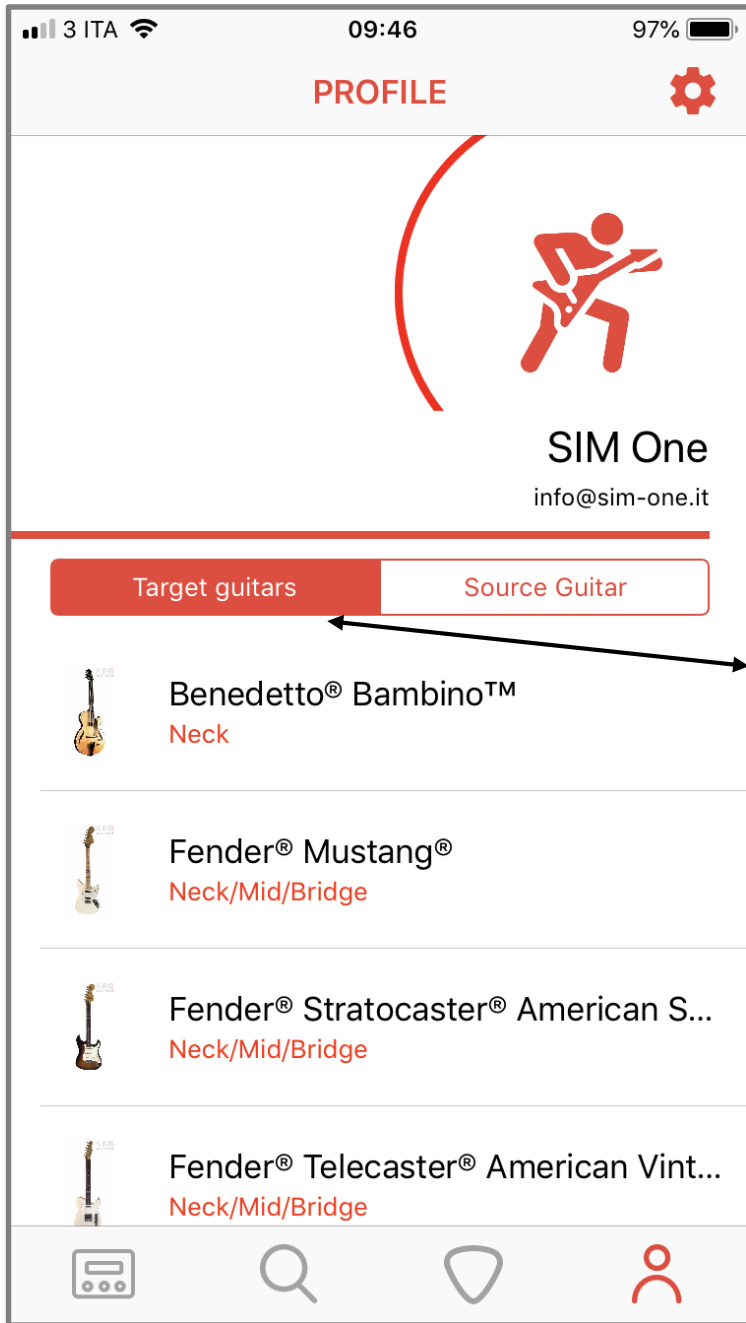

Click to see all
your available
Target Guitars

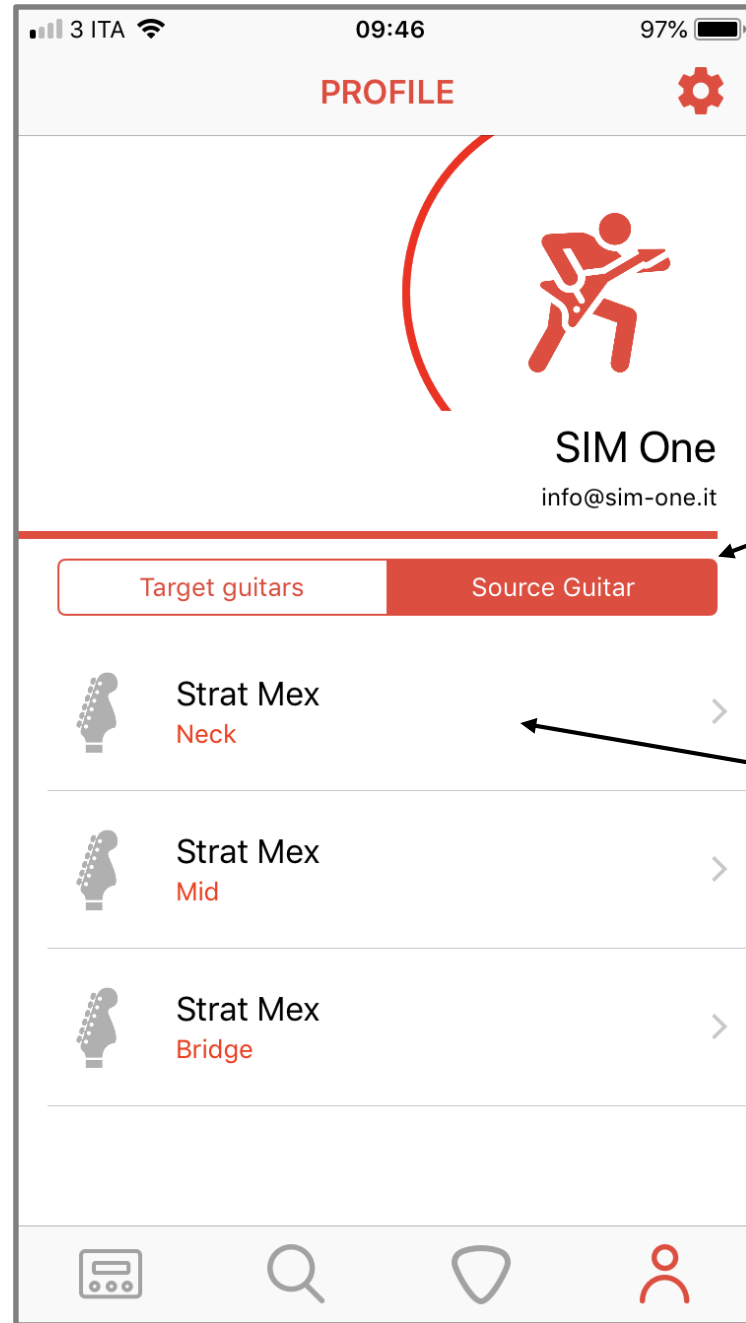

Step 5

Profile section
(Source Guitar Editing)

Click to see all
your available
Source Guitars

You can edit each
Source Guitar of this
list by clicking on it

Step 5

Profile section (Source Guitar Editing)

TestFlight 10:24 92%

SOURCE DETAIL

SOURCE DETAILS

Name (Store)	guit4
Display Name (Xt1)	guit4
Select pickup	Neck >
Comment	
File	guit4

BE SURE TO EXPORT YOUR EDITS TO XT-1 BEFORE IMPORTING, OTHERWISE THESE INFORMATION MAY BE LOSEN.

Save source

COMMUNITY


Send to community

Edit the Name for the SIM1 Store (Community Section), and the name for the XT-1 Display (max. 16 digits)

Check and eventually associate the right pickup Name


Save the edits of the Source Guitar

Share the Guitar with the Community of Users
NB: Then you will be able even to download your own guitar sound, and use it as Target Guitar

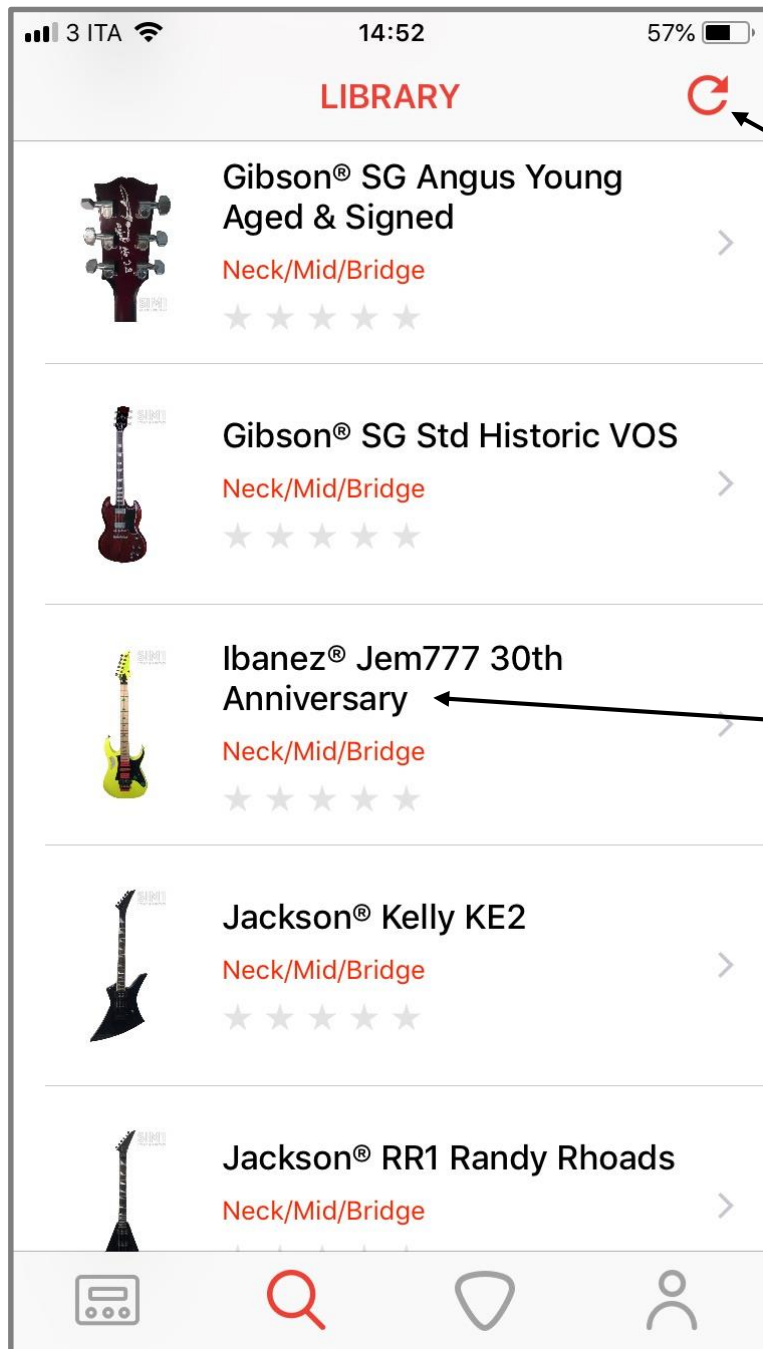

Update
the library of
Guitars on sale

Click on
the guitar
you are
interest in

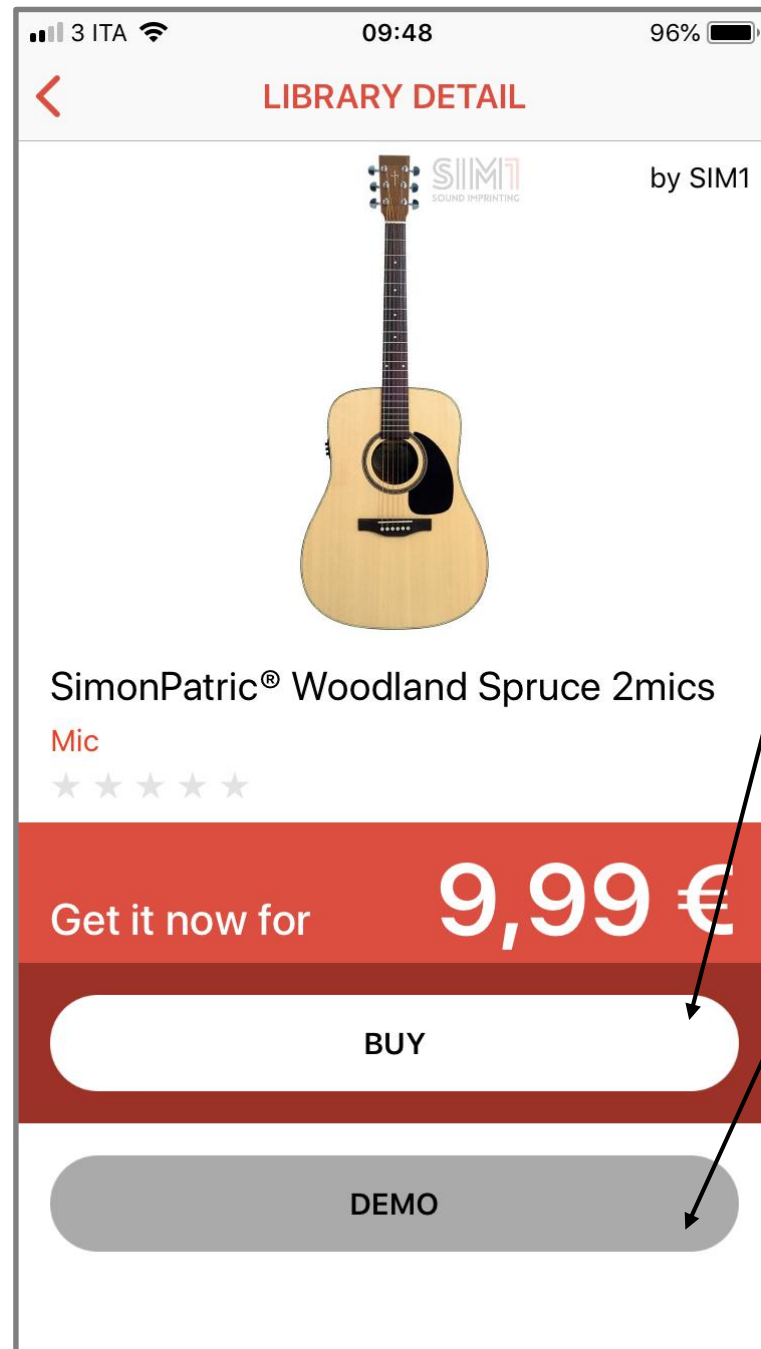


Step 6

Library section (Sound Store)


Start the purchasing
process. When
complete you will have
this guitar available
among your Target
Guitars

Start a 5 minutes trial
for free. If phone and
pedal are connected to
the same Wi-Fi network,
the Demo Mode will
start automatically on
XT-1. To end the Demo
mode before the 5
minutes trial is enough
to hold the “Down” ▼
switch of XT-1 for 5
seconds

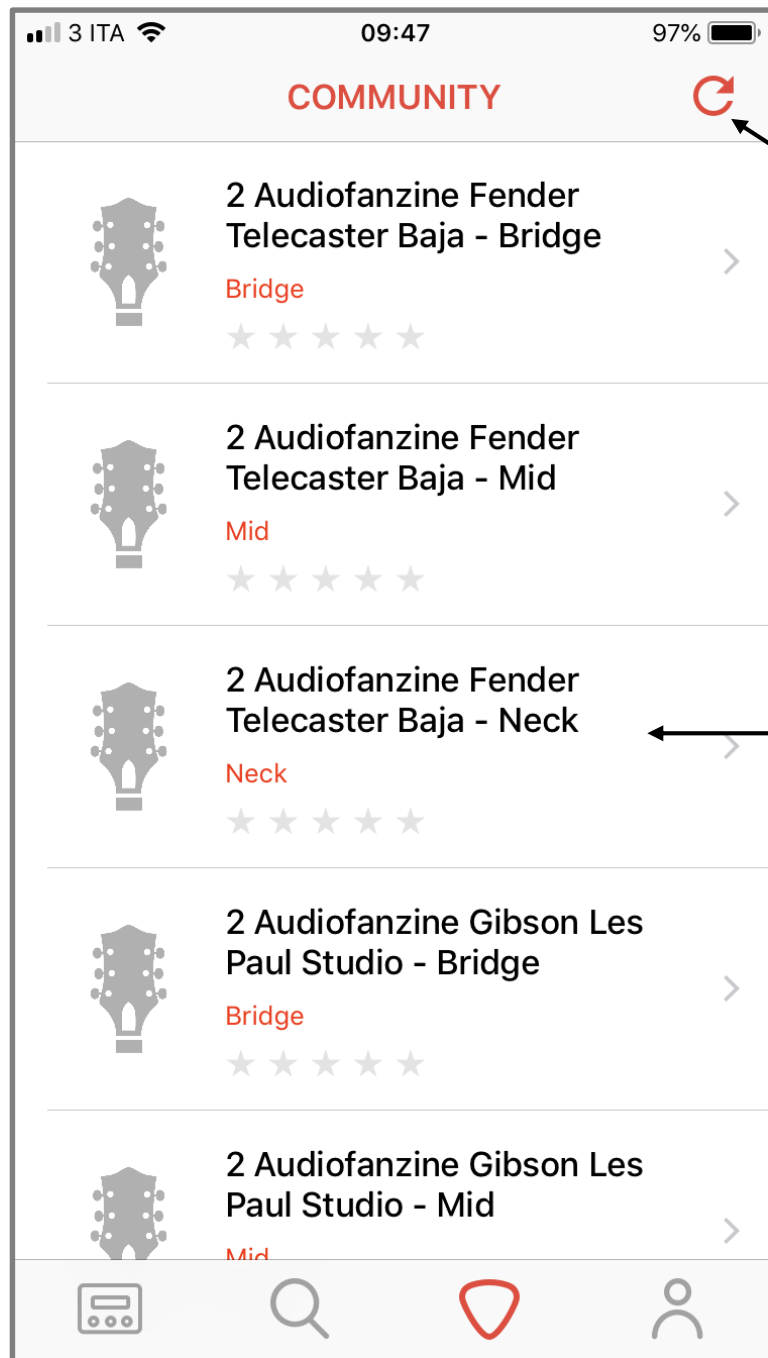

Update
the library of
Guitars of the
Community

Click on
the guitar
you are
interest in

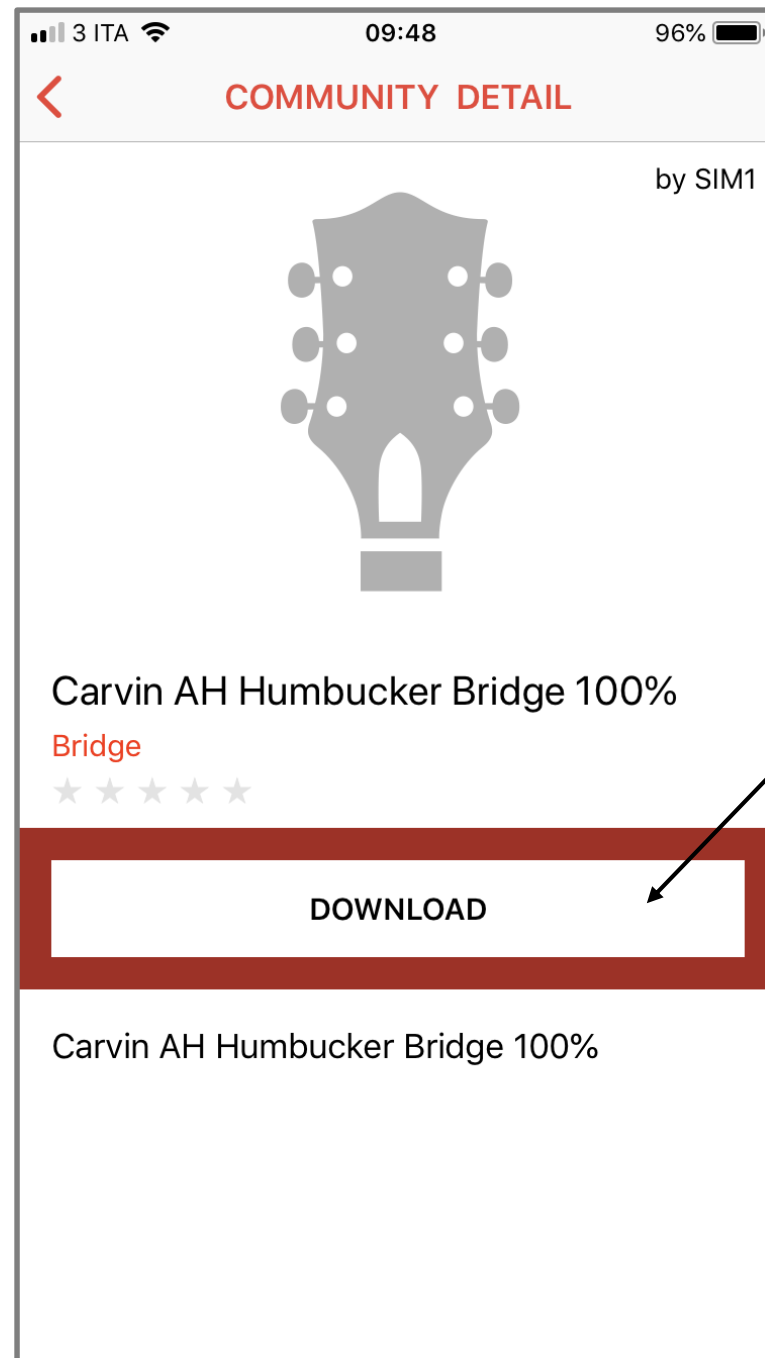

Step 7
Community section
(Free of Charge Sounds)

Start the free
downloading
process. You will
have this guitar
available among
your Target
Guitars