





XT-1 CONFIGURATION MANAGER

User Manual – EN


XT - 1
ONE PEDAL - INFINITE GUITARS

MAC VERSION (OS 10.7 or UP): Download & Installation

- Visit the website www.sim-one.it to get the last updated version of the software in the DOWNLOAD section;
- In System Preference Section of your MAC, make sure to tick "Mac App Store and identified developers" ←
- Click on the file (for example "GuitarEditor_1.0.dmg") and start the installation procedure; ←
- Drag the "Guitar Editor" icon on the desktop in the App folder.
- Now you can open the program XT-1 Configuration Manager

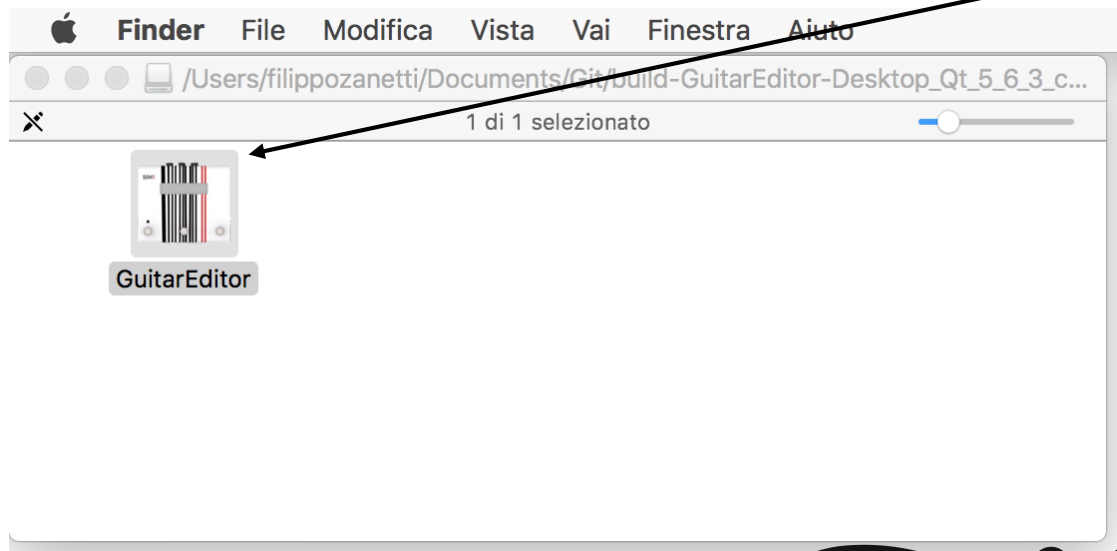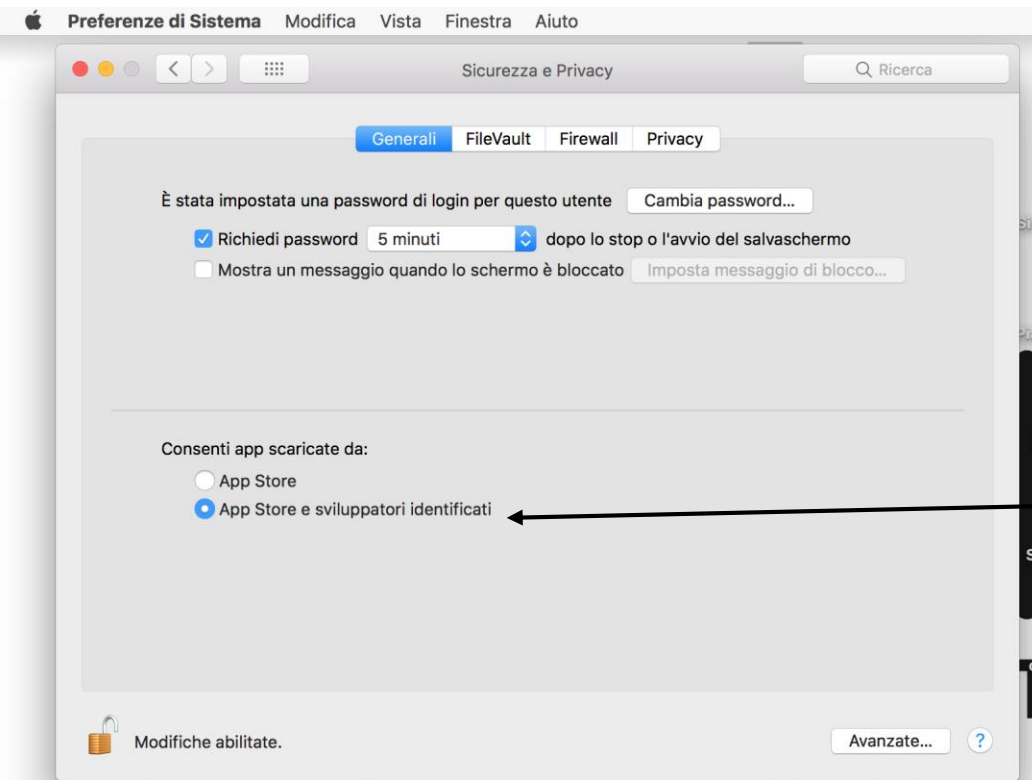


Step 1
PC VERSION (Windows 10 or up):
Download and Installation

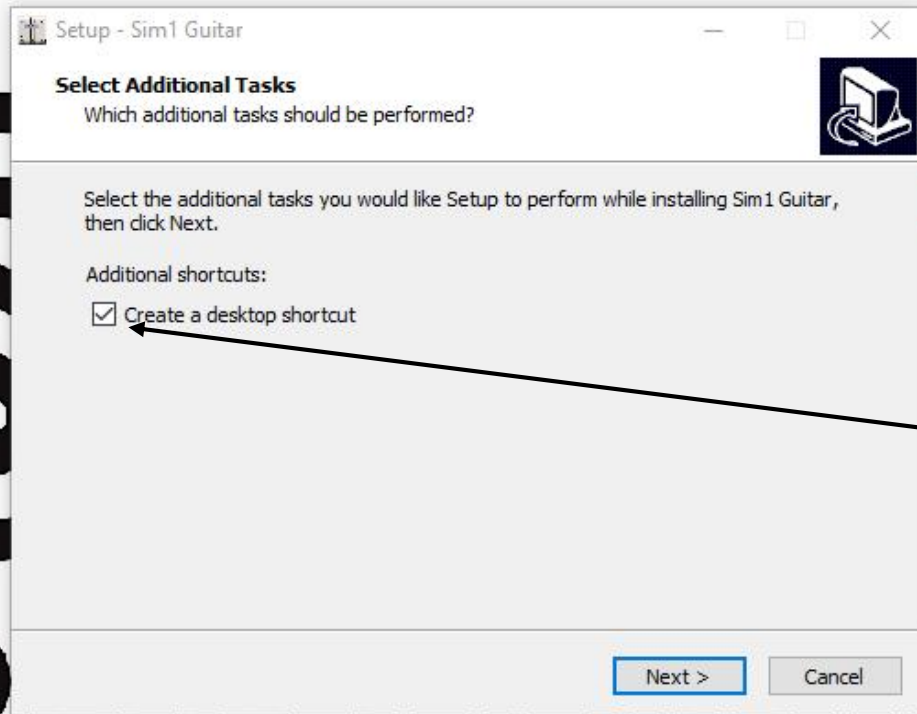

- Visit www.sim-one.it to download latest sw version;
- Click on the file "Xt1_Editor_setup" and start the installation procedure;
- Make sure to flag this box in order to have the Software Icon on your desktop, once the installation is finished;
- Click on the "Install" button. The software will be installed in few seconds and the icon will appear on your desktop;
- Now you can open the XT-1 Configuration Manager.

Step 2 Back Up of your XT-1 configuration

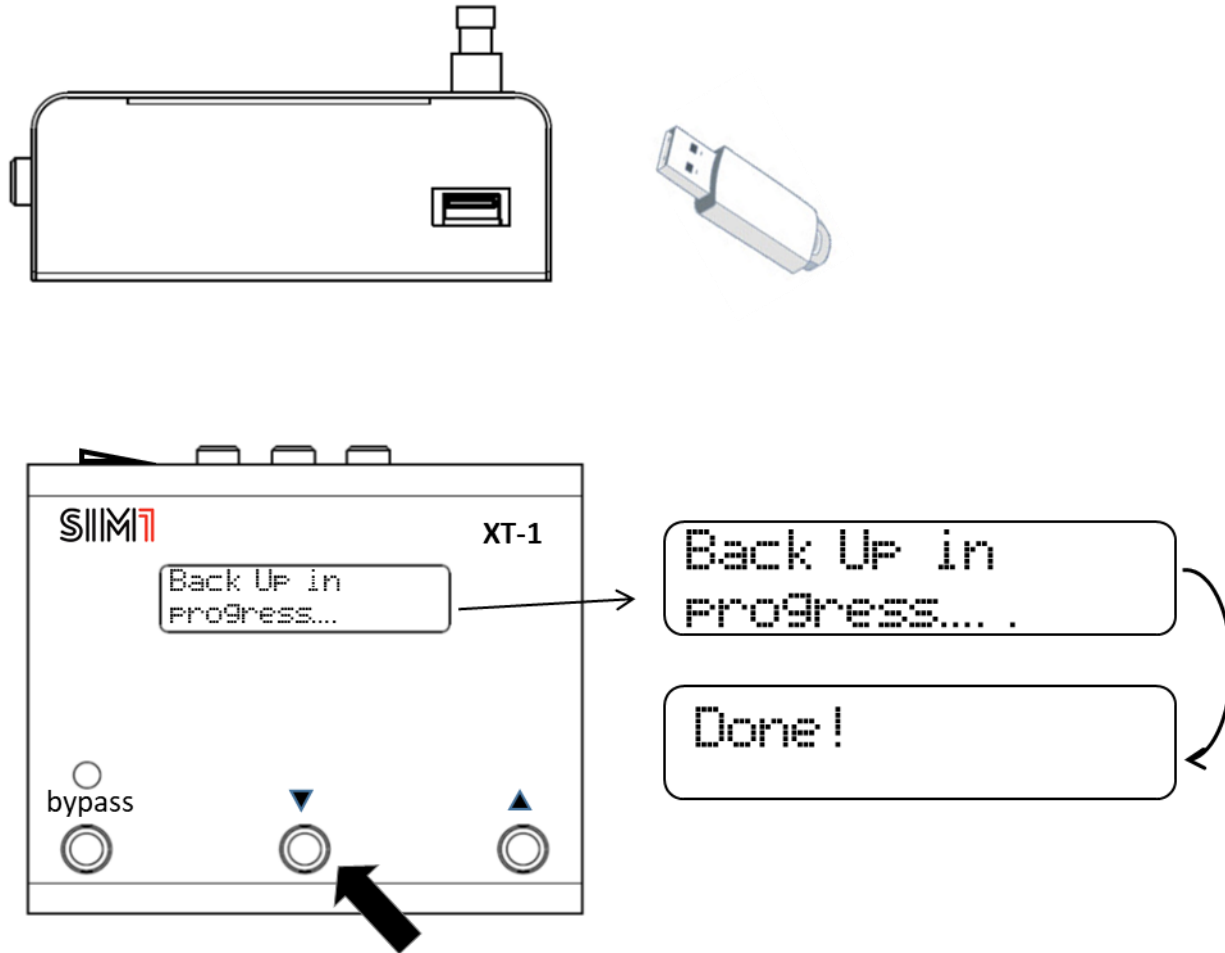

- Insert the USB key in the USB port, then hold the Down Switch for 3 seconds
- "Back Up in progress" will appear on the display, Leave the USB Key inserted into the unit until all the data will be loaded to the stick, and till "Done!" will appear on the display.
- Now you can remove the USB stick and insert it into the PC/MAC to edit your XT-1 configuration with XT-1 Configurator Manager

Create New Customer Account

Personal Information

First Name *

Stevie

This is a required field.

Last Name *

Vai

This is a required field.

☐ Sign Up for Newsletter

Sign-in Information

Email *

Stevie.Vai@gmail.com

This is a required field.

Password *

Password Strength: Strong

Confirm Password *

This is a required field.

Additional Information


Serial Number *

44b01284

This is a required field.

Step 3 (Optional) Get new Guitar Tones from SIM1's Sound Store

- Visit <https://store.sim-one.it/> to create your account
- Please make sure to type the correct Serial Number of your XT-1 pedal.
- To get your XT-1 Code just switch the pedal on. During the booting the 8 digits code will appear in the display.
- Please note that each new Guitar Tone purchased can ONLY work with the XT-1 having the same code.

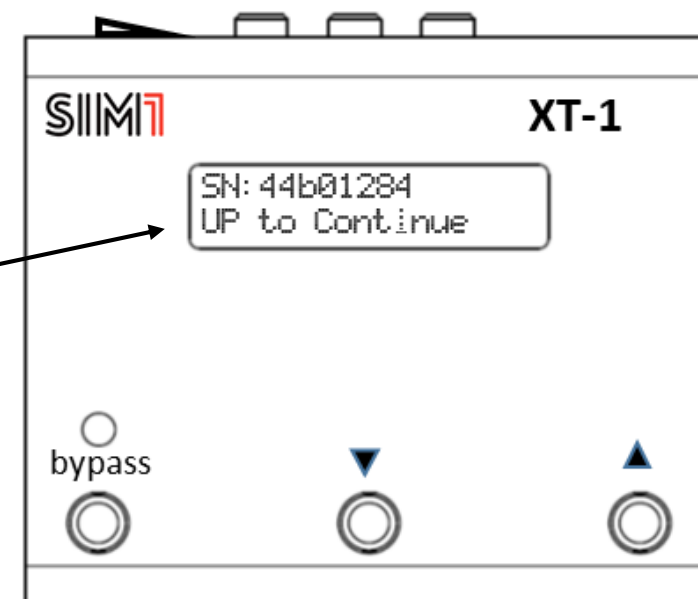



SIIM1
SOUND IMPRINTING

Paul Red Smith® Custom 24

Be the first to review this product

€9.90


IN STOCK
SKU#: T0031

Temporary Demo Sounds to Download

Neck Pickup Sound

Mid Position Pickup Sound

Bridge Pickup Sound

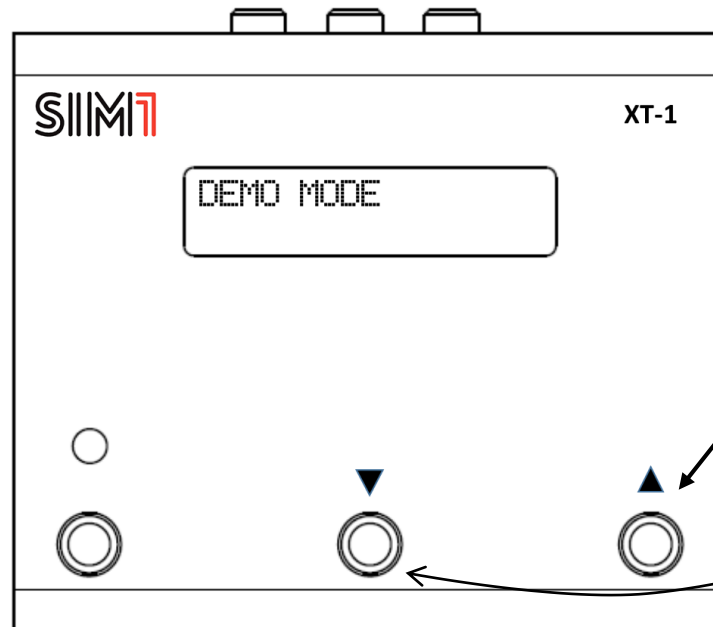

Step 3 (Optional)

Test the DEMO sounds for free from SIM1's SOUND STORE

- After the creation of your account on the website <https://store.sim-one.it/> browse the guitar library and click on the guitar you wish to test.
- Click on each of the links located below the title «Temporary Demo Sound to Download», and save the related files in the upper level of a USB key.
- Insert the key in XT-1, wait few seconds, then hold the "UP" switch for 5 seconds.
- The function DEMO MODE will start and you will have the opportunity to test for 5 minutes the guitars previously saved into the USB key. NB: During the DEMO MODE the related Source Guitar in use will be the last used.
- In case you want to stop the DEMO MODE before its 5 minutes duration, hold the "DOWN" switch for 5 seconds.

NB: Before the download of a DEMO file, it is recommended to setup your browser non to automatically open the file at the end of the download.

Step 4 Import the Back Up in the Configuration Manager Software

Open your XT-1 Configuration on your PC/Mac:

- Click on this button, browse your PC/Mac, and select the file "Xt1.arc" inside the USB key.
- Select "OK" to open the XT-1 Backup file



XT-1 CONFIGURATION MANAGER

Step 5
Set up your own
Configuration

Add patch name here

10

Source Guitar


Eko Aire

Neck


Target Guitar

Benedetto® Bambino™

Neck





T.Gain





0

Effects











Cabinet


FenderTwinRev68 

Out



0

Bal Out



0


Midi

PrCh


10

PrCh Bypass

None




Drive




10


Level



-13.5




Level




20

Cabinet




Gain




20


Level



-9




Treble dB



0

Bass dB



0

Add patch name here

11

Source Guitar


Eko Aire

Neck


Target Guitar

Gibson® ES-335 1958/2016

Neck





T.Gain





0

Effects











Cabinet


FenderTwinRev68 

Out



0

Bal Out



0

Midi

PrCh

11

PrCh Bypass

None

Add patch name here

12

Source Guitar


Eko Aire

Mid


Target Guitar

Gibson® ES-335 1958/2016

Mid





T.Gain





0

Effects











Cabinet


FenderTwinRev68 

Out



0

Bal Out



0

Midi

PrCh

12

PrCh Bypass

None

Add patch name here

13

Source Guitar


Eko Aire

Bridge


Target Guitar

Gibson® ES-335 1958/2016

Bridge





T.Gain





0

Effects











Cabinet


FenderTwinRev68 

Out



0

Bal Out



0

Midi

PrCh

13


PrCh Bypass

None

Add patch name here

Source Guitar

Target Guitar



T.Gain

Effects

Cabinet

Out

Bal Out

Midi

8

My Guitars


Sync With Store

Save as

Save

Exit

Step 5 Make your own Configuration

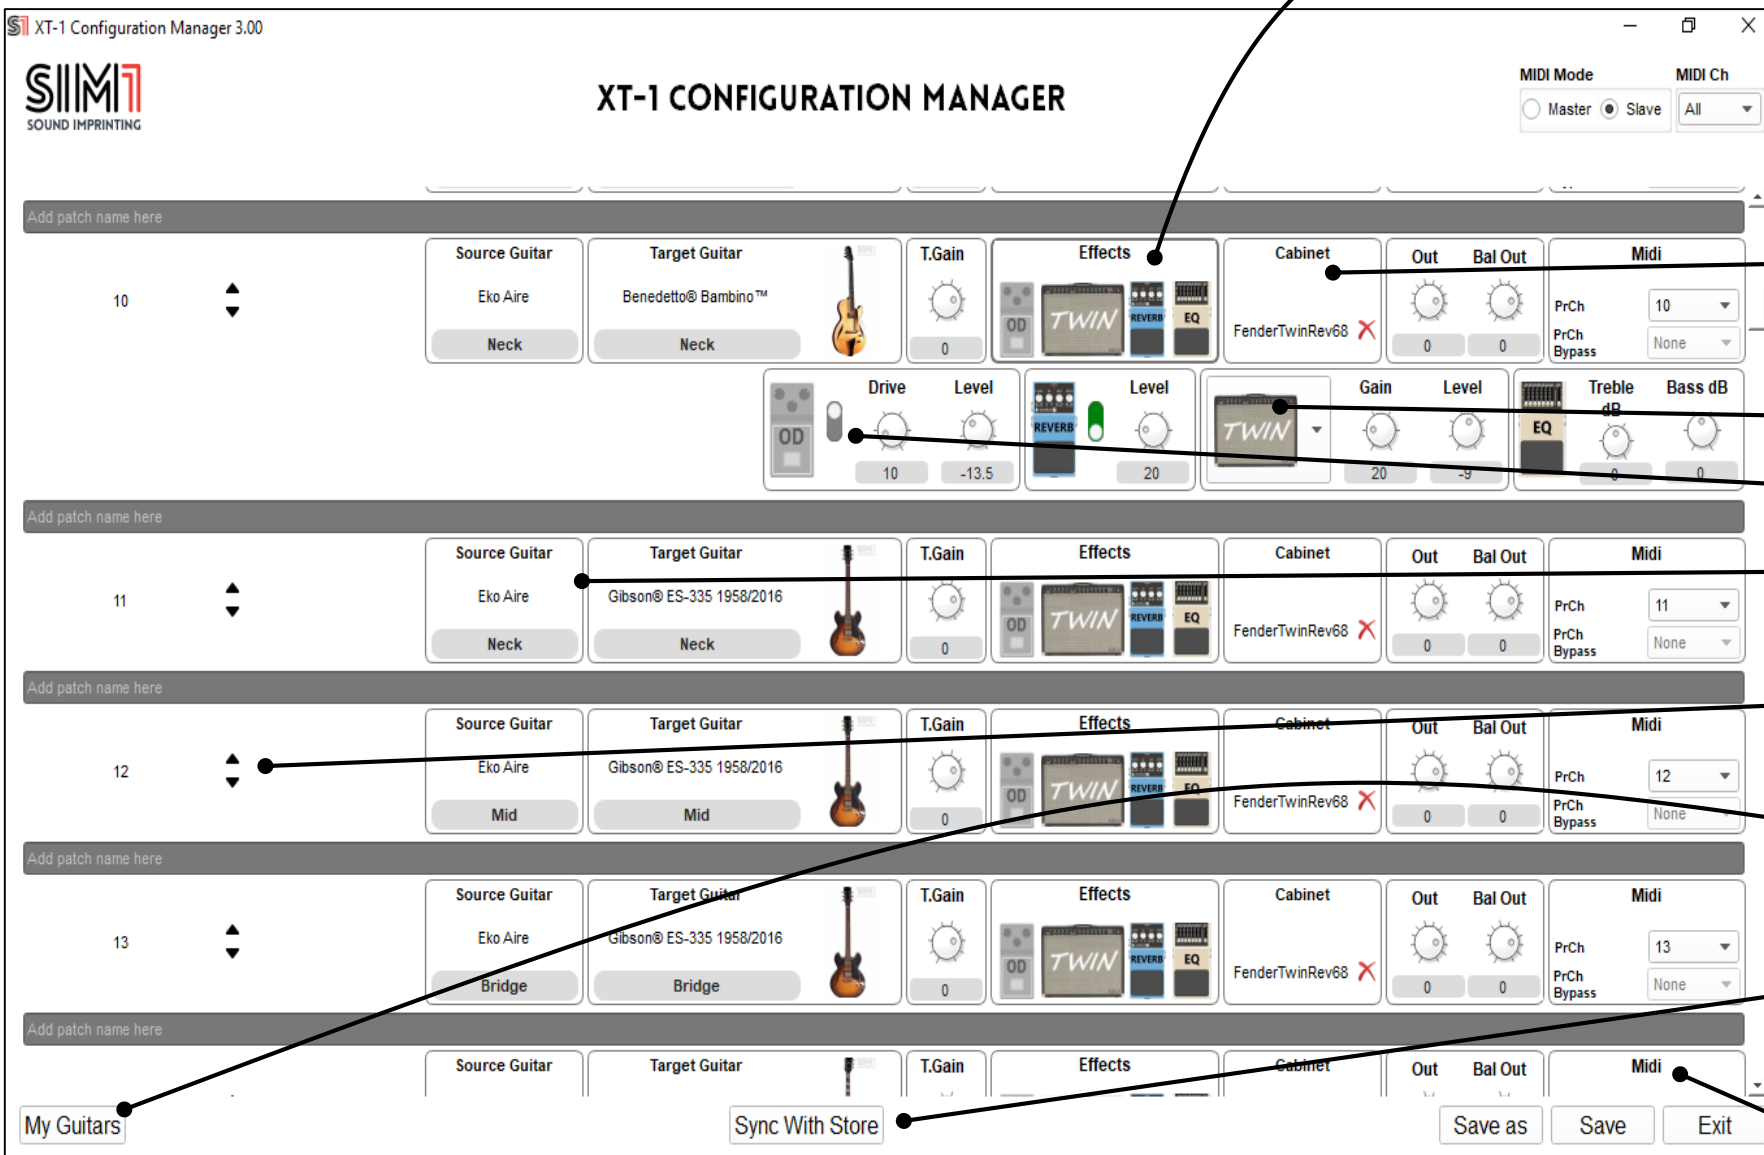

Click to open the "Effects Menu" of each bank.

For each Preset choose the cabinet (IR)

Edit the Amp Section

Activate and adjust the OD levels

Set the Source and Target Guitar you wish to use in each Bank

Switch the guitar position with the one above/below.

Edit Name/Pickup of your Source Guitars

Download the Guitar Tones you purchased from the SIM1's Sound Store (pag.6)

Configure the MIDI Program Change

Set up your own Configuration (Edit Source Guitars and Share Them)

The screenshot shows the 'XT-1 Source Guitars' configuration window. It contains a table with columns: #, Name (Web), Short Name (Display), Pickup, Show In Targets, Share, and Delete. The table lists 16 guitars. Annotations with arrows point to specific elements: 'Edit the Short Name for the display of the Source Guitar' points to the 'FiestaRed63' cell in the 'Short Name (Display)' column of row 17; 'Edit the Guitar Name for the Community Section of the Store' points to the 'FiestaRed63' cell in the 'Name (Web)' column of row 18; 'Share your Guitar with other XT-1 Users. You will find it in the "Community" Section of the web site https://store.sim-one.it/' points to the 'Share' button of row 21; 'Set the right Pickup of the Source Guitar' points to the 'Bridge' dropdown of row 26; 'Turn your Source Guitar into a Target Guitar' points to the 'Show In Targets' button of row 28; 'Delete the Source Guitar' points to the 'Delete' button of row 31; and 'Click "OK" to confirm and save' points to the 'OK' button at the bottom.

#	Name (Web)	Short Name (Display)	Pickup	Show In Targets	Share	Delete
17	Fender® Stratocaster Fiesta Red 63	FiestaRed63	N+M	Show In Targets	Share	Delete
18	Fender® Stratocaster Fiesta Red 63	FiestaRed63	Mid	Show In Targets	Share	Delete
19	Fender® Stratocaster Fiesta Red 63	FiestaRed63	M+B	Show In Targets	Share	Delete
20	Fender® Stratocaster Fiesta Red 63	FiestaRed63	Bridge	Show In Targets	Share	Delete
21	ACOUSTIC EKO	ACO EKO	Piezo	Show In Targets	Share	Delete
22	Strat58	Strat58	Neck	Show In Targets	Share	Delete
23	Strat58	Strat58	N+M	Show In Targets	Share	Delete
24	Strat58	Strat58	Mid	Show In Targets	Share	Delete
25	Strat58	Strat58	M+B	Show In Targets	Share	Delete
26	Strat58	Strat58	Bridge	Show In Targets	Share	Delete
27	LP71	LP71	Neck	Show In Targets	Share	Delete
28	LP71	LP71	Mid	Show In Targets	Share	Delete
29	LP71	LP71	Bridge	Show In Targets	Share	Delete
30	Tele64	Tele64	Neck	Show In Targets	Share	Delete
31	Tele64	Tele64	Mid	Show In Targets	Share	Delete
32	Tele64	Tele64	Bridge	Show In Targets	Share	Delete

OK Cancel

Edit the Short Name for the display of the Source Guitar

Edit the Guitar Name for the Community Section of the Store

Share your Guitar with other XT-1 Users. You will find it in the "Community" Section of the web site <https://store.sim-one.it/>


Set the right Pickup of the Source Guitar

Turn your Source Guitar into a Target Guitar

Delete the Source Guitar

Click "OK" to confirm and save

Step 5 Make your own Configuration (Download Purchased Guitars)

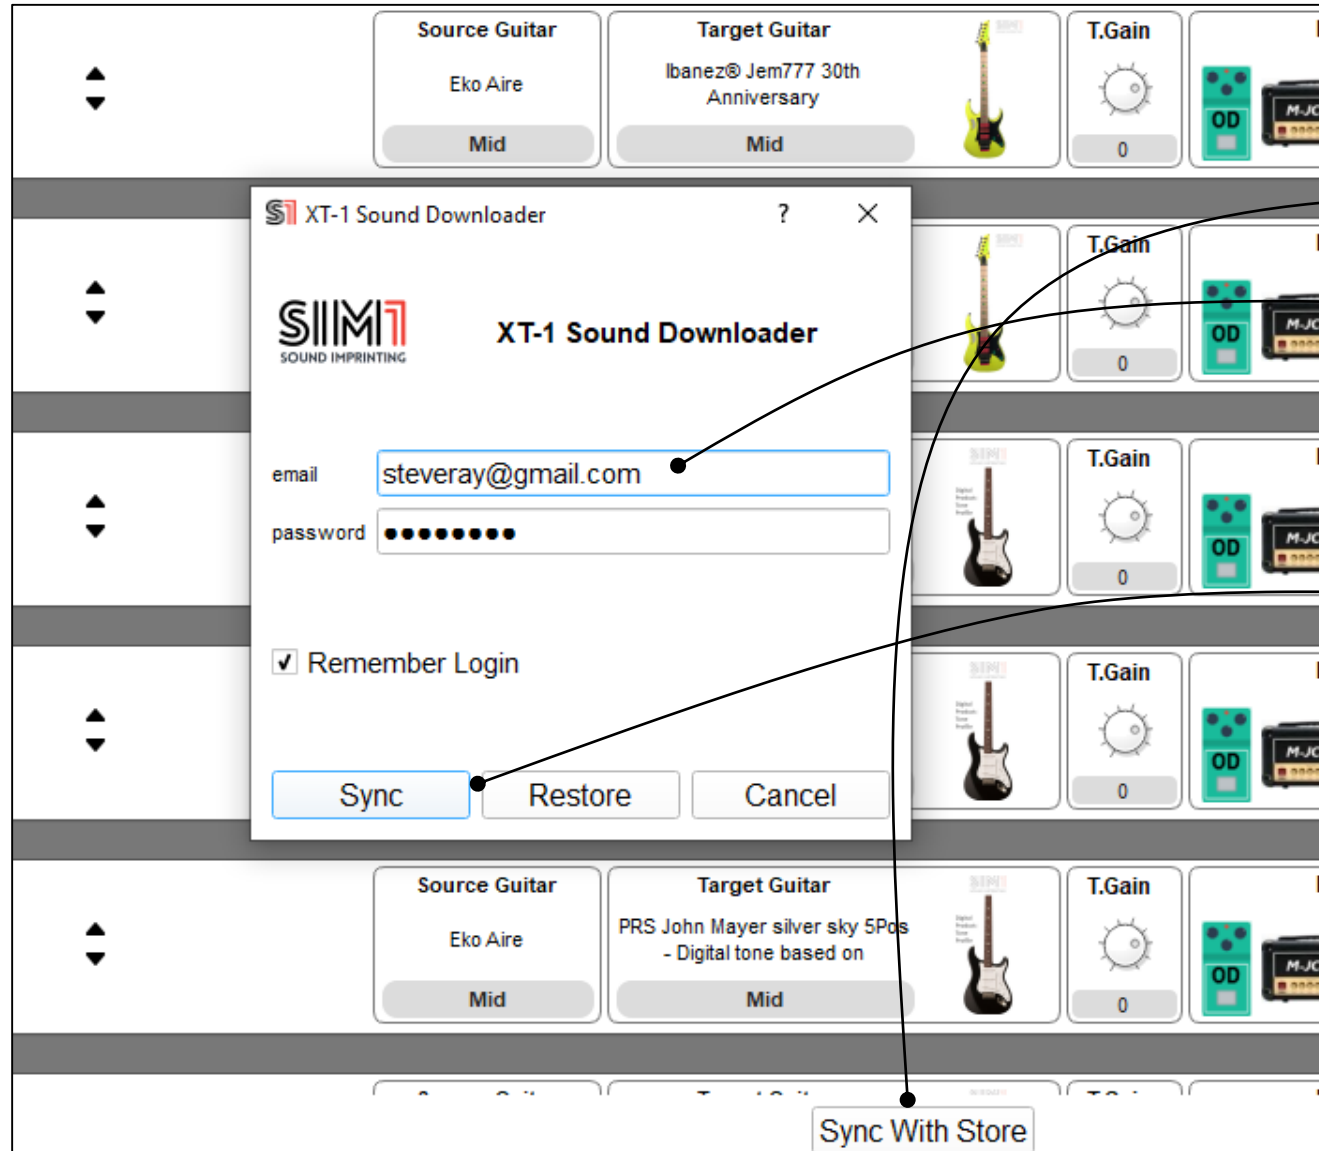

→ Click on the "Sync with Store" button

→ Type your email and Password of your account of the website "store.sim-one.it"

→ Click "Sync" to import the last Guitars you have purchased from the Store/Community.

Click on "Restore" to download again all the guitar tones previously purchased from the Store/Community.

Then you will have them available in your list of the Target Guitars

XT-1 CONFIGURATION MANAGER

MIDI Mode MIDI Ch
☐ Master ☒ Slave All


Step 6

Save your new configuration and upload it on your XT-1

Source Guitar	Target Guitar	T.Gain	Effects	Cabinet	Out	Bal Out	Midi
Eko Aire Neck	Fender® Stratocaster® American Special Neck	0	OD TWIN REVERB EQ	FenderTwinRev68	0	0	PrCh 1 PrCh Bypass None
Eko Aire Mid	Fender® Stratocaster® American Special Mid	0	OD TWIN REVERB EQ	FenderTwinRev68	0	0	PrCh 2 PrCh Bypass None
Eko Aire Bridge	Fender® Stratocaster® American Special Bridge	0	OD TWIN REVERB EQ	FenderTwinRev68	0	0	PrCh 3 PrCh Bypass None
Eko Aire Neck	Fender® Telecaster® American Vintage '64 Neck	0	OD TWIN REVERB EQ	FenderTwinRev68	0	0	PrCh 4 PrCh Bypass None
Eko Aire Mid	Fender® Telecaster® American Vintage '64 Mid	0	OD TWIN REVERB EQ	FenderTwinRev68	0	0	PrCh 5 PrCh Bypass None

Sync With Store Save as Save Exit

- When you are satisfied of your own new configuration, Save it and Exit.

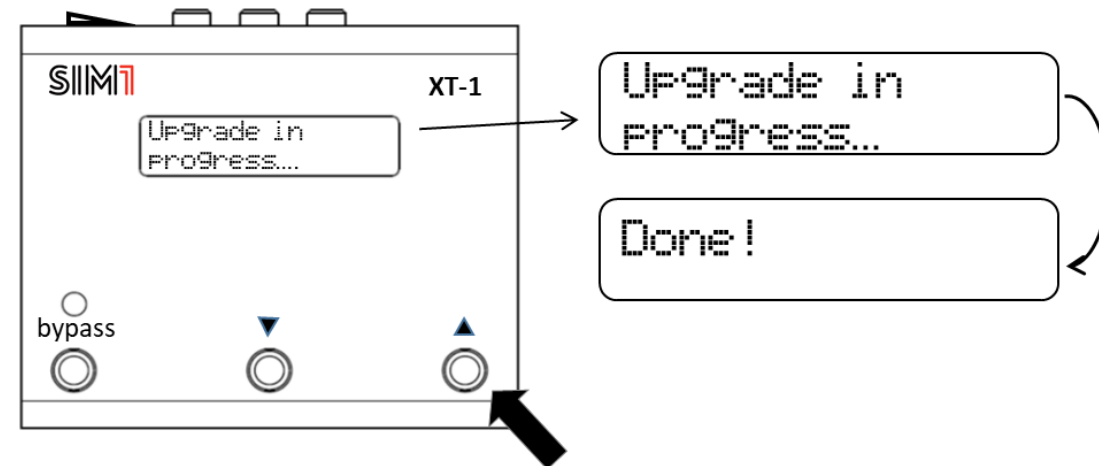

- Insert the USB key into the XT-1 device. Hold for 3 seconds the UP Switch.
- On the display will appear "Upgrade...". Leave the USB Pendrive inserted into the until the "Computing process" is finished and "Done!" will appear on the display.

NB: It's possible to rename the file "xt1.arc" and save different configurations. Just make sure to have only one backup file in the USB pendrive when you wish to transfer it to the pedal.